

# Technical Manual

# JBL CONTROL 19CST



## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Capacity: 140W Continuous Program
- Frequency Range: 42 Hz – 200 Hz
- Sensitivity: 95 dB, 1 Watt @ 1 Meter

### SYSTEM COMPONENTS:

- Grille: 389-00027-01
- Low Frequency Transducer: 203mm (8 in.) Cone Transducer 124-58000-00
- DC Resistance: 5.05 ohm
- Taps: 60W, 30W, 15W at 70V/100V
- Network: 129-10038-00

### AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 10.0V\* Input, 40 Hz to 400 kHz


### PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 345mm x 345mm Dia. (13.6 x 13.6 in. Dia.)
- Shipping Weight: 26 lbs. (11.7 kg.) (in Pairs)


### WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

## PACKAGE

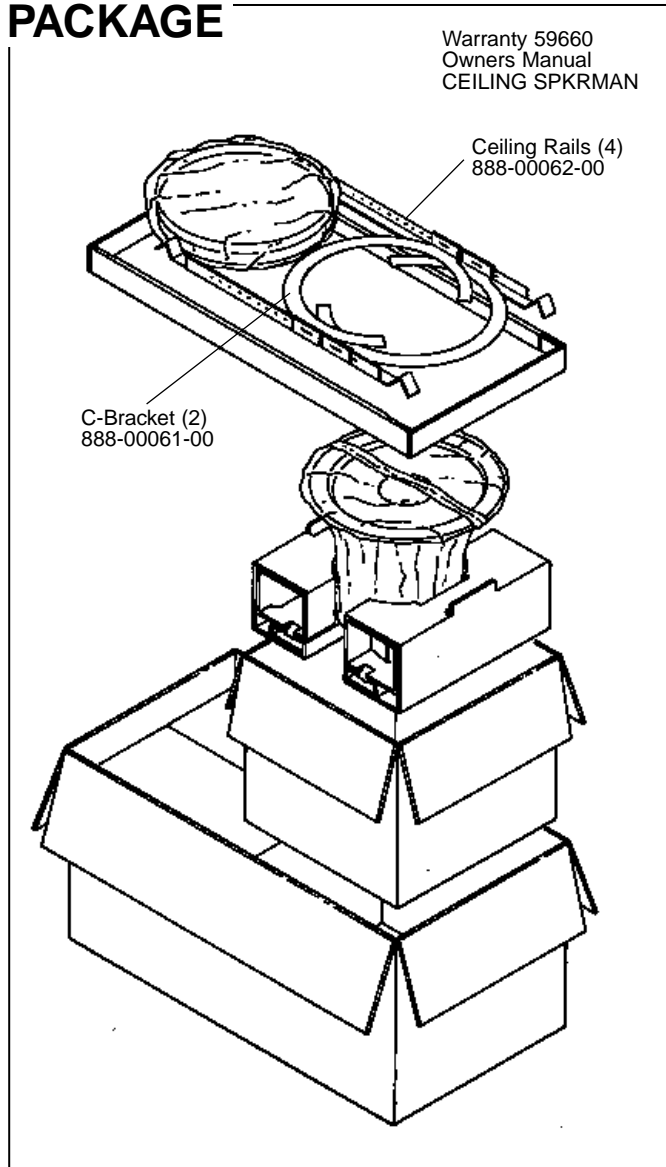

## WIRING DIAGRAM

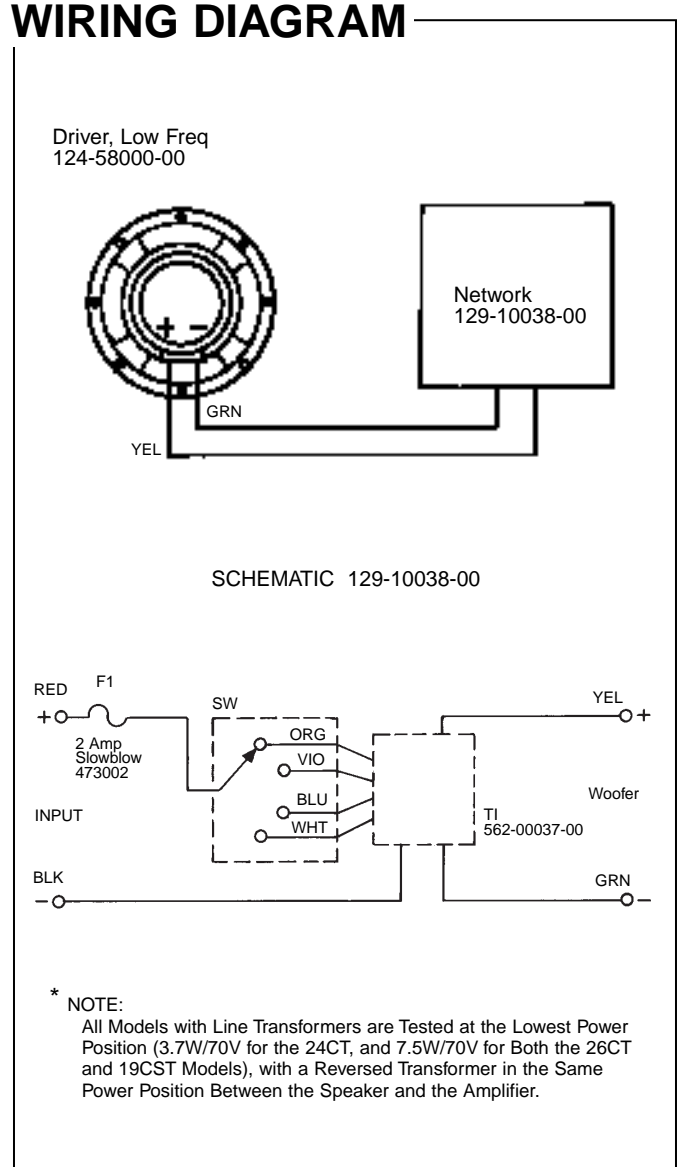

JBL CONTROL 19CST REV E

# JBL CONTROL 19CST

# COMPONENT EXPLODED VIEW

# JBL CONTROL 19CST

